



# Murrflex cable protection conduits

## Type EWT-PA

-40 to +120 °C  
Short periods +150 °C

Mod. polyamide 6

V2


> 300 N/100 mm

Suitable fittings:  
m-tec; SVT; USH-EWT; KFW/D


Two-part slit cable protection conduit made from polyamide with medium mechanical strength. Very suited for the installation or retrofitting of pre-assembled cables.

### Applications:

- Easy routing of pre-assembled cables
- Repair of existing systems
- Easy to retrofit
- Particularly fast insertion of cables, especially over long stretches

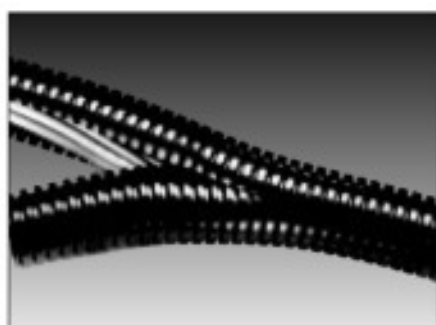

EWT-PA

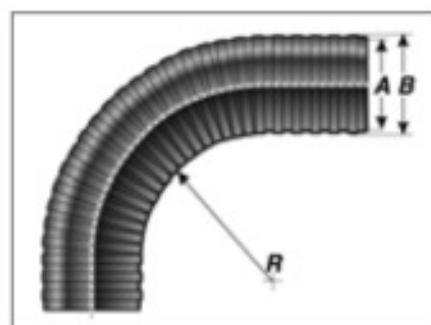

Type	Order no.	Colour	A Ø mm	B Ø mm	R mm stat.	R mm dyn.	Weight kg/100 m	Suitable for	Pack m
EWT-PA-10	83261010	Black	8.9	13.6	55.0	-	3.6	SVT 10 EH-Pg 09 EH-M12x5 / 9	50
EWT-PA-14	83261012	Black	12.5	18.5	75.0	-	6.1	SVT 14 EH-Pg 16 EH-M20x1.5 / 16 EH-NPT 1/2 / 16	50
EWT-PA-20	83261014	Black	19.8	25.9	105.0	-	9.3	SVT 20 EH-Pg 21 EH-M25x1.5 / 21 EH-NPT 3/4 / 21	50
EWT-PA-23	83261016	Black	23.7	31.3	125.0	-	11.7	SVT 23	50
EWT-PA-37	83261018	Black	31.7	41.9	170.0	-	19.2	SVT 37 EH-Pg 36 EH-M40x1.5 / 36 EH-NPT 1 1/4 / 36	25
EWT-PA-45	83261020	Black	43.1	54.2	170.0	-	26.2	EH-Pg 48 EH-M50x1.5 / 48 EH-NPT 2 / 48	25

KE installation aid for longitudinally slit conduit, see "Tools" chapter

Suitable SVT fitting, see "Special fittings" chapter