


Basic Controller SIMATIC S7-1200 All in one!

SIMATIC S7-1200 Basic Controllers are the ideal choice when it comes to performing automation tasks in the low-to mid-performance range with maximum flexibility and efficiency. They deliver convincing results thanks to their comprehensive range of technological functions and integrated IOs, as well as their compact, space-saving design. Thanks to standardized remote control protocols, you can connect SIMATIC S7-1200 controllers directly to your control center without any programming effort.

A further decisive benefit is the incorporation of all SIMATIC controllers into the Totally Integrated Automation Portal (TIA Portal): all SIMATIC controllers have access to a shared database, a standardized operating concept, and integrated services, such as communication protocols like PROFINET.

That means reduced engineering effort and faster commissioning for you. The user-friendly and innovative operation of the TIA Portal, as well as the integrated system diagnostics, also contribute to efficient working.

SIMATIC controllers support automation solutions that are scalable in performance and functionality, and thus cost-efficient in every case. The functionality of the SIMATIC S7-1200 controllers is seamlessly continued by the SIMATIC S7-1500 controllers that have been developed for more complex tasks and that are also available in a compact version. This universality means you benefit from uniform sequences and thus maximum efficiency in engineering, operation, and maintenance, and when migrating to new systems.

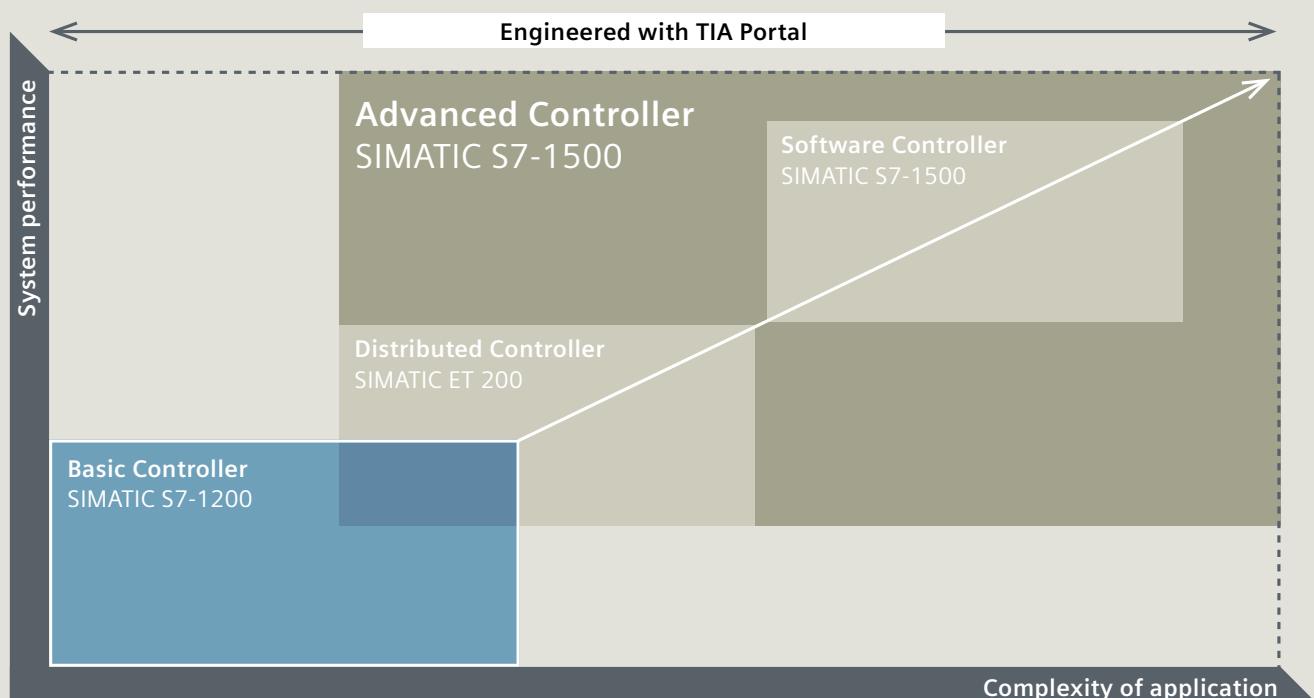

Scalable performance and functionality for consistent and efficient engineering: The functionality of the SIMATIC S7-1200 controllers is seamlessly continued by the SIMATIC S7-1500 devices. This makes subsequent expansions easier and more cost-effective.

Central processing units

Standard modules		Article No.	Article No.
CPU 1211C		50 KB, DI 6x24 V DC, DQ 4x24 V DC or 4xRLY, AI 2x10 bit 0–10 V DC, expandable to 3 CM DC/DC/DC 6ES7 211-1AE40-0XB0 AC/DC/RLY 6ES7 211-1BE40-0XB0 DC/DC/RLY 6ES7 211-1HE40-0XB0	CPU 1217C  150 KB, DI 10x24 V DC, 4x1.5 V differential, DQ 6x24 V DC, 4x1.5 V differential, AI 2x10 bit 0–10 V DC, AQ 2x10 bit 0–20 mA, line driver IO for (1 MHz ±1.5 V), expandable to 3 CM + 8 SM DC/DC/DC 6ES7 217-1AG40-0XB0
CPU 1212C		75 KB, DI 8x24 V DC, DQ 6x24 V DC or 6xRLY, AI 2x10 bit 0–10 V DC, expandable to 3 CM + 2 SM DC/DC/DC 6ES7 212-1AE40-0XB0 AC/DC/RLY 6ES7 212-1BE40-0XB0 DC/DC/RLY 6ES7 212-1HE40-0XB0	
CPU 1214C		100 KB, DI 14x24 V DC, DQ 10x24 V DC or 10xRLY, AI 2x10 bit 0–10 V DC, expandable to 3 CM + 8 SM DC/DC/DC 6ES7 214-1AG40-0XB0 AC/DC/RLY 6ES7 214-1BG40-0XB0 DC/DC/RLY 6ES7 214-1HG40-0XB0	
CPU 1215C		125 KB, DI 14x24 V DC, DQ 10x24 V DC or 10xRLY, AI 2x10 bit 0–10 V DC, AQ 2x10 bit, 0 to 20 mA, expandable to 3 CM + 8 SM DC/DC/DC 6ES7 215-1AG40-0XB0 AC/DC/RLY 6ES7 215-1BG40-0XB0 DC/DC/RLY 6ES7 215-1HG40-0XB0	
Fail-safe modules			
CPU 1212FC		100 KB, DI 8x24 V DC, DQ 6x24 V DC or 6xRLY, AI 2x10 bit 0–10 V DC, expandable to 3 CM + 2 SM DC/DC/DC 6ES7 212-1AF40-0XB0 DC/DC/RLY 6ES7 212-1HF40-0XB0	
CPU 1214FC		125 KB, DI 14x24 V DC, DQ 10x24 V DC or 10xRLY, AI 2x10 bit 0–10 V DC DC/DC/DC 6ES7 214-1AF40-0XB0 DC/DC/RLY 6ES7 214-1HF40-0XB0	
CPU 1215FC		150 KB, DI 14x24 V DC, DQ 10x24 V DC or 10xRLY, AI 2x10 bit 0–10 V DC, AI 2x10 bit, 0 to 20 mA DC/DC/DC 6ES7 215-1AF40-0XB0 DC/DC/RLY 6ES7 215-1HF40-0XB0	

Also available as SIPLUS S7-1200 for use under extreme environmental conditions.


For more information, see siemens.com/sipplus-extreme

Communication

Communications modules	Article No.	Communications processors	Article No.	Telecontrol and teleservice	Article No.
CM 1241 RS232 	6ES7 241-1AH32-0XB0	CP 1242-7 GPRS 	6GK7 242-7KX31-0XE0	TS adapter IE Basic	6ES7 972-0EB00-0XA0
CM 1241 RS422/485 	6ES7 241-1CH32-0XB0	CP 1243-7 LTE 	6GK7 243-7KX30-0XE0	TS adapter IE Advanced	6ES7 972-0EA00-0XA0
CM 1243-2 AS-i master 	3RK7 243-2AA30-0XB0	CP 1243-1 Security 	6GK7 243-1BX30-0XE0	TS module	
DCM 1271 AS-i data decoupling 	3RK7 271-1AA30-0AA0	CP 1243-1 DNP3 protocol 	6GK7 243-1JX30-0XE0	TS module modem	6ES7 972-0MM00-0XA0
CM 1242-5 PROFIBUS DP slave 	6GK7 242-5DX30-0XE0	CP 1243-1 IEC 60870-5-104 protocol 	6GK7 243-1PX30-0XE0	TS module ISDN	6ES7 972-0MD00-0XA0
CM 1243-5 PROFIBUS DP master 	6GK7 243-5DX30-0XE0	CP 1243-1 PCC (Plant Cloud Connect) 	6GK7243-1HX30-0XE0	TS module RS232	6ES7 972-0MS00-0XA0
Partner product		Communications board		Telecontrol and teleservice	
HMS CM CAN Open	Article No. 21620	CB 1241 RS485	Article No. 6ES7 241-1CH30-1XB0	TS module GSM	6GK7 972-0MG00-0XA0
				Quad-band GSM/UMTS/LTE ANT794-4MR antenna	
				6NH9 860-1AA00	
				Control center connection	
				Telecontrol Server Basic 8	
				6NH9 910-0AA21-0AA0	
				Telecontrol Server Basic 64	
				6NH9 910-0AA21-0AB0	
				Telecontrol Server Basic 256	
				6NH9 910-0AA21-0AC0	

Further Telecontrol products are also available, for more details, see siemens.com/telecontrol

Our product portfolio at a glance

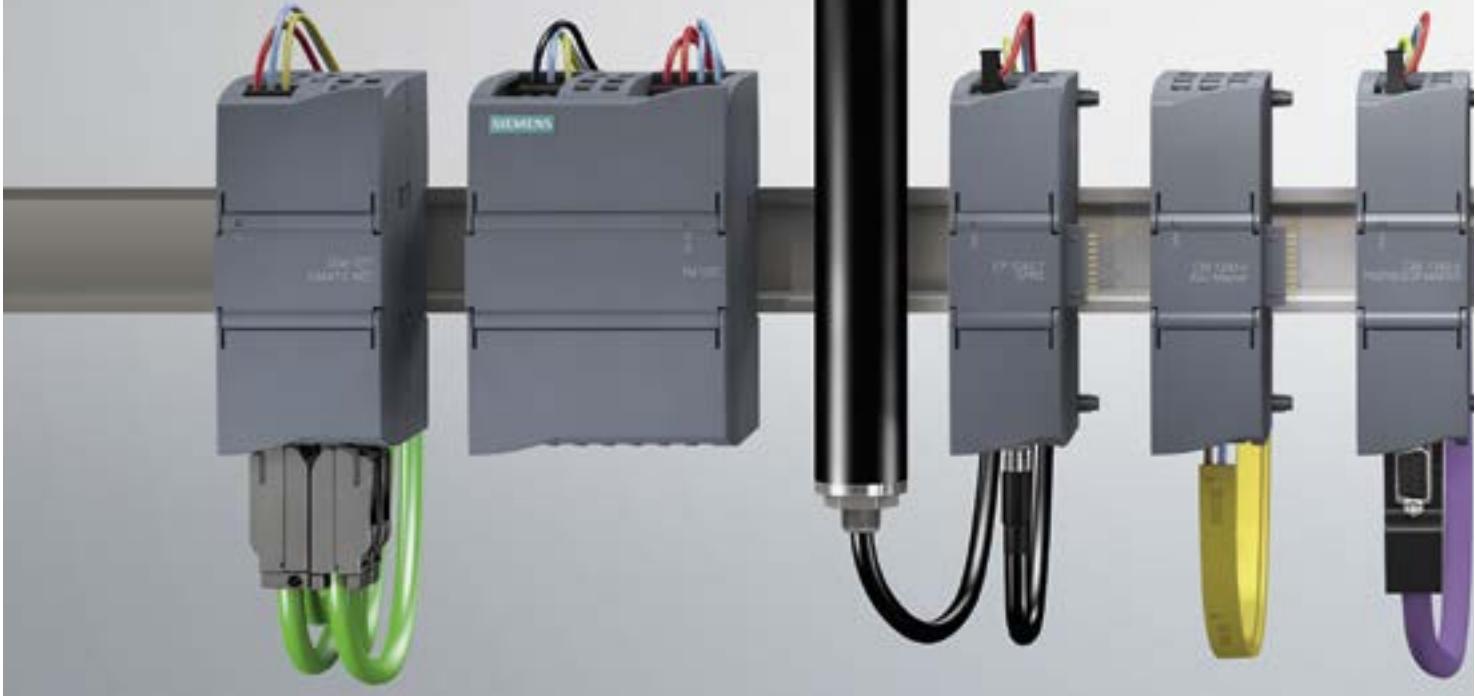

Signal modules

Signal modules – digital



Article No.

SM 1221 DC	
DI 8x24 V DC	6ES7 221-1BF32-0XB0
DI 16x24 V DC	6ES7 221-1BH32-0XB0
SM 1222 DC	
DQ 8x24 V DC 0.5 A	6ES7 222-1BF32-0XB0
DQ 16x24 V DC 0.5 A	6ES7 222-1BH32-0XB0
SM 1222 RLY	
DQ 8xRLY 30 V DC/250 V AC 2 A	6ES7 222-1HF32-0XB0
DQ 16xRLY 30 V DC/250 V AC 2 A	6ES7 222-1HH32-0XB0
DQ 8xRLY switchover 30 V DC/250 V AC 2 A	6ES7 222-1XF32-0XB0
SM 1223 DC/DC	
DI 8x24 V DC, DQ 8x24 V DC 0.5 A	6ES7 223-1BH32-0XB0
DI 16x24 V DC, DQ 16x24 V DC 0.5 A	6ES7 223-1BL32-0XB0
SM 1223 DC/RLY	
DI 8x24 V DC, DQ 8xRLY 30 V DC/250 V AC 2 A	6ES7 223-1PH32-0XB0
DI 16x24 V DC, DQ 16xRLY 30 V DC/250 V AC 2 A	6ES7 223-1PL32-0XB0
SM 1223 AC/RLY	
DI 8x120/250 V AC, DQ 8xRLY 30 V DC/250 V AC 2 A	6ES7 223-1QH32-0XB0

Signal modules – analog

Article No.

SM 1231 AI	
AI 4x13 bit ± 10 V DC, ± 5 V DC, ± 2.5 V DC or 4–20 mA	6ES7 231-4HD32-0XB
SM 1231 RTD	
AI 4xRTD x16 bit	6ES7 231-5PD32-0XB
AI 8xRTD x16 bit	6ES7 231-5PF32-0XB
SM 1231 TC	
AI 4xTC x16 bit	6ES7 231-5QD32-0XB
AI 8xTC x16 bit	6ES7 231-5QF32-0XB
SM 1232 AQ	
AQ 2x14 bit ± 10 V DC or 4–20 mA	6ES7 232-4HB32-0XB
AQ 4x14 bit ± 10 V DC or 4–20 mA	6ES7 232-4HD32-0XB
SM 1234 AI/AQ	
AI 4x13 bit ± 10 V DC, ± 5 V DC, ± 2.5 V DC or 4–20 mA, AQ 2x14 bit ± 10 V DC or 4–20 mA	6ES7 234-4HE32-0XB
SM 1238 Energy Meter 480VAC	
Energy measuring module for data acquisition in 1- and 3-phase networks (TN, TT) up to 480 V AC; Current range: 1 A, 5 A	6ES7 238-5XA32-0BX



Signal boards



	Article No.
SB 1221 DC* 200 kHz	
DI 4x5 V DC*	6ES7 221-3AD30-0XB0
DI 4x24 V DC*	6ES7 221-3BD30-0XB0
SB 1222 DC 200 kHz	
DQ 4x5 V DC 0.1 A	6ES7 222-1AD30-0XB0
DQ 4x24 V DC 0.1 A	6ES7 222-1BD30-0XB0
SB 1223 DC/DC	
DI 2x24 V DC/DQ 2x24 V DC 0.5 A	6ES7 223-0BD30-0XB0
SB 1223 DC*/DC 200 kHz	
DI 2x5 V DC*/DQ 2x5 V DC 0.1 A	6ES7 223-3AD30-0XB0
DI 2x24 V DC*/DQ 2x24 V DC 0.1 A	6ES7 223-3BD30-0XB0
SB 1232 AQ	
AQ 1x12 bit ±10 V DC or 0–20 mA	6ES7 232-4HA30-0XB0
SB 1231 AI	
AI 1x12 bit ±10 V DC, ±5 V DC, ±2.5 V DC or 0–20 mA	6ES7 231-4HA30-0XB0
SB 1231 RTD	
AI 1xRTDx16 bit, type: Platinum (Pt)	6ES7 231-5PA30-0XB0
SB 1231 TC	
AI 1xTCx16 bit, types: J, K voltage range: ± 80 mV	6ES7 231-5QA30-0XB0

*Sourcing input

Signal modules – fail-safe

	Article No.
SM 1226 F-DQ 2 x relay	
F-DQ RLY 2x5 A 30 V DC/250 V AC	6ES7 226-6RA32-0XB0
SM 1226 F-DQ 4 x 24 V DC	
F-DQ 4x2 A 24 V DC	6ES7 226-6DA32-0XB0
SM 1226 F-DI 16 x 24 V DC	
F-DI 16x24 V DC	6ES7 226-6BA32-0XB0

Engineering framework

SIMATIC STEP 7 software

	Article No.
SIMATIC STEP 7 SP1 Basic V13	
	6ES7 822-0AA03-0YA5
Software Update Service SIMATIC STEP 7 Basic	
	6ES7 822-0AA00-0YLO
Upgrade SIMATIC STEP 7 Basic V11–V12 to V13	
Floating license	6ES7 822-0AA03-0YE5
SIMATIC STEP 7 Safety Basic V13 SP1	
Floating license	6ES7833-1FB13-0YA5
Software Update Service STEP 7 Safety Basic – Standard	
	6ES7833-1FD00-0YX2

Accessories

	Article No.
BB 1297	Battery board (long-term backup of real-time clock [RTC]) 6ES7 297-0AX30-0XA0

Memory card

4 MB (optional)	6ES7 954-8LC02-0AA0
12 MB (optional)	6ES7 954-8LE02-0AA0
24 MB (optional)	6ES7 954-8LF02-0AA0
256 MB (optional)	6ES7 954-8LL02-0AA0
2 GB (optional)	6ES7 954-8LP01-0AA0
32 GB (optional)	6ES7 954-8LT02-0AA0

Digital input simulators

	Simulator (8 positions for CPU 1211C/1212C) 6ES7 274-1XF30-0XA0
	Simulator (14 positions for CPU 1214C/1215C) 6ES7 274-1XH30-0XA0
	Simulator (14 positions for CPU 1217C) 6ES7 274-1XK30-0XA0

Analog input simulators

	Potentiometer: for all CPUs 6ES7 274-1XA30-0XA0
--	--

Expansion cable for signal module

	2.0 m 6ES7 290-6AA30-0XA0
--	------------------------------

CSM 1277

	4-port unmanaged switch, 4 x RJ45 sockets, 10/100 Mbit/s 6GK7 277-1AA10-0AA0
--	--

Technology

	Article No.
IO-Link	SM 1278 IO-Link master 6ES7 278-4BD32-0XB0

SIWAREX weighing modules

	SIWAREX WP231, non-automatic weighing machine 7MH4 960-2AA01
	SIWAREX WP241, belt scales 7MH4 960-4AA01
	SIWAREX WP251, weigh feeder, sacking system scale and bagging scale 7MH4 960-6AA01

Condition monitoring

	SM 1281 condition monitoring 6AT8007-1AA10-0AA0
--	--

Power modules

	Article No.
PM 1207	Input: 120/230 V AC, 50/60 Hz, 1.2 A/0.67 A Output: 24 V DC/2.5 A 6EP1 332-1SH71

Operator control and monitoring

	Article No.
SIMATIC HMI KP300 Basic mono PN	Operation using keys, 3" FSTN display, monochrome, adjustable backlighting color (white, red, green, yellow) PROFINET 6AV6 647-0AH11-3AX0
SIMATIC HMI KP400 Basic color PN	Operation using keys, high-resolution 4" TFT widescreen display, 256 colors PROFINET 6AV6 647-0AJ11-3AX0
SIMATIC HMI KTP400 Basic	Operation using touchscreen + keys, 4" TFT widescreen display, 65,536 colors PROFINET 6AV2 123-2DB03-0AX0
SIMATIC HMI KTP700 Basic	Operation using touchscreen + keys, 7" TFT widescreen display, 65,536 colors, PROFINET or PROFIBUS PROFINET 6AV2 123-2GB03-0AX0 PROFIBUS 6AV2 123-2GA03-0AX0
SIMATIC HMI KTP900 Basic	Operation using touchscreen + keys, 9" TFT widescreen display, 65,536 colors PROFINET 6AV2 123-2JB03-0AX0
SIMATIC HMI KTP1200 Basic	Operation using touchscreen + keys, 12" TFT widescreen display, 65,536 colors, PROFINET or PROFIBUS PROFINET 6AV2 123-2MB03-0AX0 PROFIBUS 6AV2 123-2MA03-0AX0

For more information, see www.siemens.com/basic-panels

Identification systems

	Article No.
SIMATIC RF120C	Communications module for direct connection of SIMATIC identification systems to the SIMATIC S7-1200 6GT2002-0LA00
SIMATIC RF200	RFID system in the HF range, compact and cost-efficient, easy connection to the automation system 6GT2821-
SIMATIC RF300	RFID system in the HF range, high-capacity data memory and high-speed recording, easy connection to the automation system 6GT2801-
SIMATIC MV400	Optical code reading system for barcodes, data matrix codes (DMC), text recognition (OCR), verification 6GF34-

For more information, see www.siemens.com/codereader

This is what the S7-1200 controllers offer you:


- **Innovative design and easy operation**
Compact construction with integrated IOs and flexibility due to the board concept
- **Security Integrated**
Security thanks to protected access to the CPU and program copy protection
- **Technology Integrated**
Incorporated functions and flexible connection of drives
- **Versatile diagnostics**
System diagnostics indicate error messages in plain-text in the TIA Portal on the HMI or web server

- **Efficient engineering**
With SIMATIC STEP 7 Basic in the TIA Portal
- **New: Safety Integrated**
Fail-safe CPUs for the execution of standard and safety-related programs
- **Flexible integration into all network structures**
PROFINET, PROFIBUS, AS-i, IO-Link, CANopen or even connection to remote control centers
- **Use in extreme ambient conditions**
as SIPLUS S7-1200 version

The first microcontroller in both standard and safety versions

The S7-1200 CPUs with Safety Integrated can additionally assume the monitoring of safety functions – e.g. protective door with tumbler. The fail-safe sensors and actuators are integrated either centrally via fail-safe signaling modules or in a distributed manner via PROFIsafe.

Standard controller in combination with an external safety-relay solution

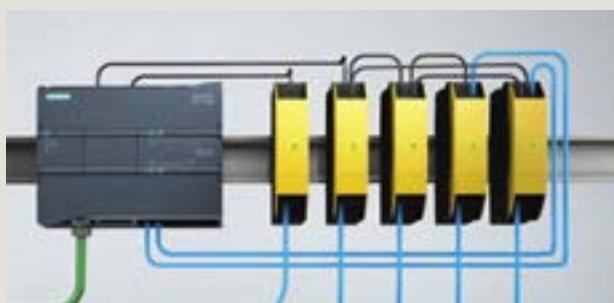

- Complex wiring of the safety function (for feedback and possible functional dependencies)
- Fault diagnosis only possible by means of onboard LEDs and not on a central HMI panel

Advantages at a glance

- Optimum integration of the safety functions into the overall sequence of production processes
- Efficient engineering in the TIA Portal
- Savings can be made even with just using a few safety features

Integrated safety solution with a fail-safe controller of the S7-1200 series



- Reduced effort required for wiring: All information (e.g. signal states and diagnoses) is already available in the system
- Efficient fault diagnosis centrally on an HMI panel

Publisher
Siemens AG 2016

Digital Factory
P.O. Box 4848
90026 Nürnberg, Germany

Article No.: DFFA-B10053-01-7600
Printed in Germany
Dispo 06336
79626 BR 041610.

Subject to changes and errors.

The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

Siemens offers automation and drives products with industrial security functions that support safe operation of the plant or machine. They are an important component in a holistic industrial security concept. With this in mind, our products undergo continuous development. We therefore recommend that you keep yourself informed with respect to our product updates, and that you only use the latest versions in each case.

You can find information on this at:

<http://support.automation.siemens.com>.

There you can also register for a newsletter specifically about these products. To ensure the secure operation of a plant or machine, it is also necessary to take suitable preventive action (e.g. cell protection concept) and to integrate the automation and drive components into a state-of-the-art, holistic industrial security policy for the entire plant or machine. Products used from other manufacturers should also be taken into account here.

For more information, go to
www.siemens.com/industrialsecurity

Follow us at
twitter.com/siemensindustry
youtube.com/siemens

Basic Controller SIMATIC S7-1200:

- New: SIMATIC S7-1200 with PROFIsafe and Energy Meter module
- Automation Tasks (Tutorials)
- Customer references

Discover more:
siemens.com/s7-1200