



Network technology

from Murrelektronik

 **MURR**
ELEKTRONIK

stay connected



INDUSTRIAL COMMUNICATION NETWORKS ARE THE BACKBONE OF DIGITIZATION

Machine and system communications are rapidly increasing. Networks act as a lifeline for data streams. To guarantee successful digitization you have to have powerful and reliable network technology. You need to ask if the communication network is strong enough to handle the increase in flexible applications and find out what the prerequisites are to reliably network a combination of classic and/or digital devices. Finally, you need to know if the application is ready for future advances in data communication.

The design, planning and implementation of industrial communication networks requires an in-depth knowledge of automation technology and takes into consideration the main requirements for networking data - reliability, openness and flexibility.

Murrelektronik knows it is not only the ability to provide components, which range from basic switches all the way up to the latest in POE technology and the cables to connect them, that matters but also the ability provide support and tips to help our partners optimize data flow while reducing their wiring efforts.

Sharing knowledge, presenting options (including their pros and cons) and explaining the „point of use“ for the components allows you to see industrial networks as a whole and highlights the added value of the chosen solution.

SYSTEM NETWORKING VS. REQUIRED NETWORKING

Today's production facilities have to be flexible and easy to change. As a result, the design of the network topology is key to ensuring the data-related functional reliability of the machines and systems and to make sure it is in line with current requirements. It is also important to check the concept for redundant connections through continuous segmentation and unrestricted access to the higher-level networks

In addition to being open and flexible, Industrial networks have to be designed to match the application. Individual factors selected by the end users like digital sustainability and enhanced diagnostics determine the right network topology.

OVERVIEW

CHOOSING THE RIGHT SWITCH

MANAGED SWITCHES

Profinet managed switches

- Easy implementation via TIA portal with the help of a GSDML file
- On device replacement, automatic device integration via PROFINET baptism
- Full switch integration as PROFINET device
- Implementation of ring structures via MRP ring formation
- Comprehensive diagnostic options thanks to an integrated web server, network tools and automatic topology detection
- Neighbor detection

Managed Switches

- Easy setup via the web server
- New devices are created in the web server via a configuration file
- Prioritization of PROFINET telegrams



UNMANAGED SWITCHES

- No programming required. Just plug and play
- Fastest setup
- Easy device replacement
- Inexpensive
- Wide range of options
- Prioritization of PROFINET telegrams to IEEE 802.3x
- Ethernet/IP-enabled
- IP20 and IP67 versions available

Tree PoE Switches

- 24 V and 48 V Operating voltage
- PoE+ up to 25,4 Watt



	MANAGED SWITCHES				UNMANAGED SWITCHES	
	Profinet managed switches		Managed switches			
	IP20 versions	IP67 versions	IP20 versions	IP67 versions	IP20 versions	IP67 versions
Redundant power supply	Yes	Yes	Yes	Yes	Yes, to some extent	Yes
Power supply M12 d-coded via IO port	No	Yes	No	Yes	No	Yes
RJ45	Yes	No	Yes	No	Yes	No
M12	No	Yes	No	Yes	No	Yes
4 ports	Yes	No	Yes	No	Yes	Yes
5 ports	No	Yes	No	Yes	Yes	No
6 ports	Yes	No	Yes	No	Yes	No
8 ports	No	No	No	No	Yes	Yes
10 ports	No	Yes	No	Yes	No	No
16 ports	No	No	No	No	Yes	No
Gigabit	No	Yes	No	Yes	Yes	No
NAT	No	No	Yes	Yes	No	No
SNMP V1, V2 and V3	Yes	Yes	Yes	Yes	No	No
Secure remote access (open VPN)	Yes	Yes	Yes	Yes	No	No
Secure web server	Yes	Yes	Yes	Yes	No	No
NTP (Network Time Protocol)	Yes	Yes	Yes	Yes	No	No
LLDP neighborhood topology	Yes	Yes	Yes	Yes	No	No
LLDP PN neighborhood topology	Yes	Yes	No	No	No	No
IP address (can be set, DHCP)	Yes	Yes	Yes	Yes	No	No
PROFINET prioritization	Yes	Yes	Yes	Yes	Yes	Yes
PROFINET diagnosis	Yes	Yes	No	No	No	No
PROFINET MRP slave	Yes	Yes	No	No	No	No
Diagnosis options	Yes	Yes	Yes	Yes	No	No
Mirror port	Yes	Yes	Yes	Yes	No	No
Automatic PROFINET baptism	Yes	Yes	No	No	No	No
GSDML file	Yes	Yes	No	No	No	No
Standards and approvals	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA	UL, CSA
Step 7	Yes	Yes	No	No	No	No
TIA Portal	Yes	Yes	No	No	No	No
PC Worx	Yes	Yes	No	No	No	No
PoE Power over Ethernet	No	No	No	No	Yes	No



MANAGED SWITCHES

– CONNECTIVITY FOR INDUSTRIAL APPLICATIONS

Managed switches, on the other hand, offer extensive possibilities in port and device configuration. They assume important functions for error analysis, network diagnosis and redundancy mechanisms. These switches optimize data transmission but increase the configuration effort and thus the overall costs. However, their use in a network offers advantages that provide more control including when remote access is required.



■ **Mirror ports** enable access to network data communication for logging data strings – via a free switch port. Users can take the data for analysis. Errors, the source of costly downtimes, can thus be avoided through predictive maintenance, and in addition, the machine can better utilized.

■ **Prioritized Data Transfer**

PROFINET data packages are prioritized within a network and thus transferred by the switches with greater reliability. Performance is increased by focusing on the real-time application of relevant data.


■ **Automatic PROFINET Naming**

The control system names each device within the PROFINET topology. If a device is replaced, all of the data required for resuming operation is automatically carried over to the replacement device via the control system. This saves time as the individual components do not have to be manually configured before operation resumes.



MRP RING FORMATION

Profinet managed switches can be integrated into a network as a slave. This makes redundant wiring and failsafe operation possible. If the data communication path is interrupted, devices in the communication chain are served by the other side of the ring.

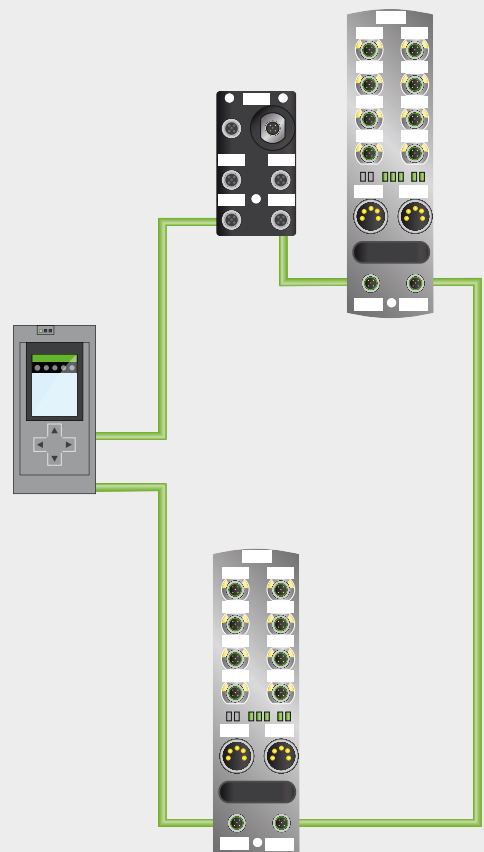

■ **Neighborhood detection**

Components support LLDP (Link Layer Discovery Protocol). They periodically send and receive information about themselves. In this way, the network topology is documented and stored in neighborhood tables.

All users receive the protocol and share information about their neighbors, while PROFINET users enjoy a corresponding overview of their topology. Device failures are picked up by the neighborhood detection function.

If a Profinet managed switch is included in the topology, device replacement is tool free. The replacement device is identified and configured automatically. This method is part of the overall „device replacement without engineering tools“ concept.




CENTRAL INTERFACE

Murrelektronik's efficient switches play a key role in PROFINET installations. Besides linear structures, they also enable star, tree and ring topologies.

- **MRP ring formation as a slave**
- **Mirror ports**
- **Optimized data transfer via prioritization**
- **Automatic PROFINET Naming**
- **Neighborhood detection**

RSTP – RAPID SPANNING TREE PROTOCOL

RSTP is a network protocol using in local networks to deactivate redundant paths. If necessary, these paths can be reactivated. In RSTP protocols, failure no longer affects the entire network structure, but is now confined to defective inaccessible paths. Intact paths remain up and running while the new topology is calculated. This ensures that only one active path exists at any time between two end devices. If it cannot be used, the protocol automatically falls back on the deactivated path ensuring high network availability.

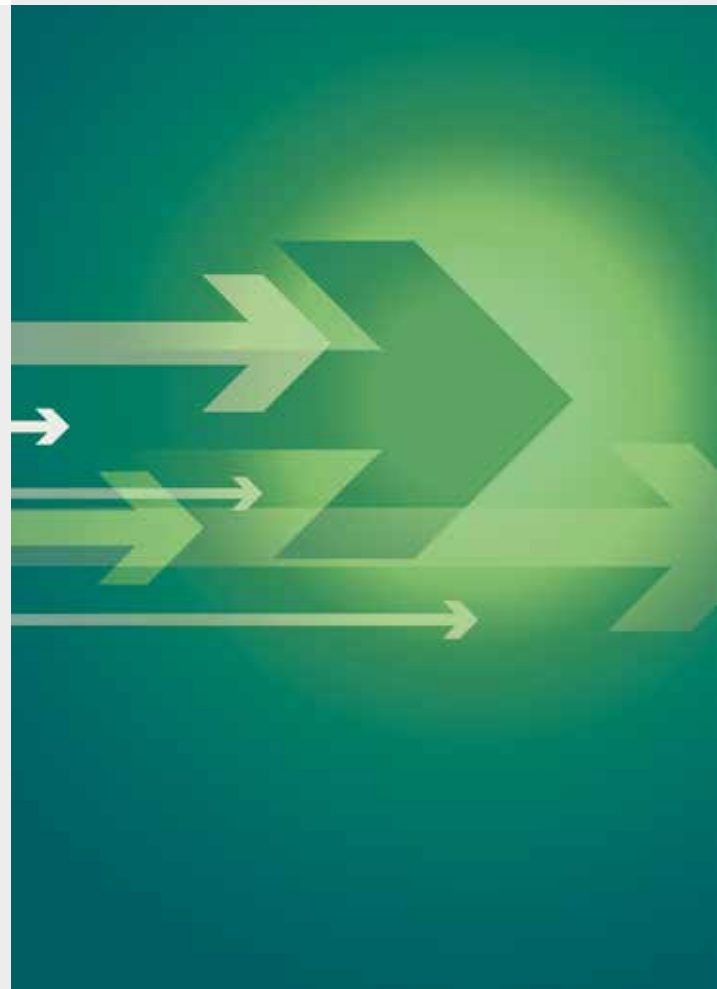

PRODUCT INFORMATION



Order data			
Art. No.	58840	58841	58842
Ports			
Fieldbus	10× M12 (female), D-coded		10× M12 (female), D-coded 2× M12 (female), X-coded 8× M12 (female), D-coded
Supply Switch	2× M12 Power 4 pole L coding 2 x max 16 A		
Technical data			
Operating voltage	9...36 V		
Transfer rate	10/100 Mbit/s full duplex		10/100/1000 Mbit/s full duplex
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Switch Form	Managed Switch	Profinet managed switch	Managed Switch
Web server	HTTP, HTTPS		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	yes		
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog		
Remote maintenance	Open VPN		
Alarm contact	no		
Fieldbus	Ethernet	Profinet/Ethernet	Ethernet
General data			
Protection type	IP67		
Enclosure	Metal		
Assembly	2-hole screw mounting		
Temperature range	-25... 70 °C (derating see manual), (storage temperature -40...+85 °C)		
Dimensions H x W x D	37x63x225 mm		
Weight	ca. 970 g		
max. operating height	3000 m		
Power consumption	3,6 W		4,4 W
Power consumption 24V	150 mA		180 mA
Diagnosis			
Communication status	per LED, LLDP		
Monitoring – no voltage	yes		

PRODUCT INFORMATION



Order data			
Art. No.	58843	58844	58845
Ports			
Fieldbus	10× M12 (female), D-coded 2× M12 (female), X-coded 8× M12 (female), D-coded	10× M12 (female), X-coded	
Supply Switch	2× M12 Power 4 pole L coding 2 x max 16 A		
Technical data			
Operating voltage	9...36 V		
Transfer rate	10/100/1000 Mbit/s full duplex		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Switch Form	Profinet managed switch	Managed Switch	Profinet managed switch
Web server	HTTP, HTTPS		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	yes		
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog		
Remote maintenance	Open VPN		
Alarm contact	no		
Fieldbus	Profinet/Ethernet	Ethernet	Profinet/Ethernet
General data			
Protection type	IP67		
Enclosure	Metal		
Montage	2-hole screw mounting		
Temperature range	-25... 70 °C (derating see manual), (storage temperature -40...+85 °C)		
Dimensions H x W x D	37x63x225 mm		
Weight	ca. 970 g		
max. operating height	3000 m		
Power consumption	4,4 W	6,0 W	
Power consumption 24V	180 mA	250 mA	
Diagnosis			
Communication status	per LED, LLDP		
Monitoring – no voltage	yes		

PRODUCT INFORMATION



Order data			
Art. No.	58850	58851	58852
Ports			
Fieldbus	10× M12 (female), D-coded		10× M12 (female), D-coded 2× M12 (female), X-coded 8× M12 (female), D-coded
Supply Switch	2× M12 Power 5-pole L coding 2 x max 16 A		
Technical data			
Operating voltage	9...36 V		
Transfer rate	10/100 Mbit/s full duplex		10/100/1000 Mbit/s full duplex
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Switch Form	Managed Switch	Profinet managed switch	Managed Switch
Web server	HTTP, HTTPS		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	yes		
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog		
Remote maintenance	Open VPN		
Alarm contact	no		
Fieldbus	Ethernet	Profinet/Ethernet	Ethernet
General data			
Protection type	IP67		
Enclosure	Metal		
Montage	2-hole screw mounting		
Temperature range	-25... 70 °C (derating see manual), (storage temperature -40...+85 °C)		
Dimensions H x W x D	37x63x225 mm		
Weight	ca. 970 g		
max. operating height	3000 m		
Power consumption	3,6 W		4,4 W
Power consumption 24V	150 mA		180 mA
Diagnosis			
Communication status	per LED, LLDP		
Monitoring – no voltage	yes		

PRODUCT INFORMATION





Order data			
Art. No.	58853	58854	58855
Ports			
Fieldbus	10× M12 (female), D-coded 2× M12 (female), X-coded 8× M12 (female), D-coded	10× M12 (Female), X-coded	
Supply Switch	2× M12 Power 5 polig L codiert 2 x max 16 A		
Technical data			
Operating voltage	9...36 V		
Transfer rate	10/100/1000 Mbit/s full duplex		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Switch Form	Profinet managed switch	Managed Switch	Profinet managed switch
Web server	HTTP, HTTPS		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	yes		
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog		
Remote maintenance	Open VPN		
Alarm contact	no		
Fieldbus	Profinet/Ethernet	Ethernet	Profinet/Ethernet
General data			
Protection type	IP67		
Enclosure	Metal		
Montage	2-hole screw mounting		
Temperature range	-25... 70 °C (derating see manual), (storage temperature -40...+85 °C)		
Dimensions H x W x D	37x63x225 mm		
Weight	ca. 970 g		
max. operating height	3000 m		
Power consumption	4,4 W	6,0 W	
Power consumption 24V	180 mA	250 mA	
Diagnosis			
Communication status	per LED, LLDP		
Monitoring – no voltage	yes		

PRODUCT INFORMATION

Profinet managed switch			
Order data			
Art. No.	58184	58185	58186
Ports			
Fieldbus	5 × M12 (Female), D-coded	4 × RJ45	6 × RJ45
System supply	1 × M12 (Male), A-coded	Spring-cage terminal: 0.2...2.5 mm ²	
Supply voltage	1 x 24 V via M12, A-coded	2 x 24 V via MSTBO 2.5/4-G1R	
Polarity protection	yes		
Relay for alarm contact	no		yes
Technical data			
Betriebsspannung	9,5...31,5V		
Max. power consumption	3 W	2,5 W	3 W
Transfer rate	10/100 Mbit/s		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Switch Form	PROFINET – Managed Switch		
Web server	HTTP, HTTPS		
Vlan (Qos) IEEE 802.P	yes		
Port Mirroring	yes		
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI)		
Remote maintenance	Open VPN		
Alarm contact	no		yes
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP67	IP20	
Enclosure	Black plastic		
Fastening type	3-hole screw fastening	DIN rail (EN 50022)	
Temperature range	0 to +60 °C (storage temperature -40 to +85 °C)		
Dimensions H x W x D	105×60×40 mm	111×22.5×99 mm	111×45×99 mm
Weight	ca. 250 g	ca. 130 g	ca. 250 g
max. operating height	3000 m		
Shock/Vibration	30g/10g	15g/1g	
Profinet			
Addressing	DHCP		
FSU (Fast-Start-Up)	no		
Shared Device/Input	no		
Specification	V2.3, Conformance Class B		
MRP	Yes / Slave		
Diagnosis			
Communication status	per LED, LLDP		
Monitoring – no voltage	yes		

PRODUCT INFORMATION

Managed Switch			
Order data			
Art. No.	58183	58181	58182
Ports			
Fieldbus	5 × M12 (Female), D-coded	4 × RJ45	6 × RJ45
System supply	1 × M12 (Male), A-coded	Spring-cage terminal: 0.2...2.5 mm ²	
Supply voltage	1 x 24 V via M12, A-coded	2 x 24 V via MSTBO 2.5/4-G1R	
Polarity protection	yes		
Relay for alarm contact	no		yes
Technical data			
Betriebsspannung	9.5...31.5 V		
Max. power consumption	3 W	2,5 W	3 W
Transfer rate	10/100 Mbit/s full duplex		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Switch Form	Managed Switch		
Web server	HTTP, HTTPS		
Vlan (Qos) IEEE 802.P	yes		
Port Mirroring	yes		
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI)		
Remote maintenance	Open VPN		
Alarm contact	no		yes
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP67	IP20	
Enclosure	Black plastic		
Fastening type	3-hole screw fastening	snaps onto mounting rail (EN 50022)	
Temperature range	0 to +60 °C (storage temperature -40 to +85 °C)		
Dimensions H x W x D	105×60×40 mm	111×22.5×99 mm	111×45×99 mm
Weight	ca. 250 g	ca. 130 g	ca. 250 g
max. operating height	3000 m		
Shock/Vibration	30g/10g	15g/1g	
Diagnosis			
Communication status	per LED, LLDP		
Monitoring – no voltage	yes		

UNMANAGED SWITCHES

Unmanaged switches provide Ethernet devices with network connections so that they can communicate with each other. As intermediaries, they add additional ports to the network, do not provide intelligent functions, nor can they control network traffic. In industrial environments, unmanaged switches are often used in small networks.

IP67 Unmanaged Switches

Murrelektronik's IP67 switches have a compact and very robust housing. These switches can also be powered directly via an output port from fieldbus modules such as Impact67, MVK Metal or SOLID67.

PoE Unmanaged switches

The PoE Switches are available for any PoE application, no matter whether 24 V or 48 V operating voltage. With up to 25.4 W at one port, all PoE+ subscribers can be supplied. In addition, they offer a high data transmission rate of 1000 MBit/s.







XELITY®

Although developed and produced in Germany **Xelity®** series switches are inexpensive. Once complete, the series will include managed and unmanaged switches with a choice of 4, 6, 8, 16 or 24 ports in a compact housing. The switches have a similar housing with push in terminals for the power connection that make installation simple. They are resistant to EMC influences and are able to be redundantly supplied with power to ensure system availability. They prioritize Profinet protocols while transferring data packages of up to 100 Mbit/s. The high temperature range (-25 to +60 °C) and UL listing allow for worldwide usage.



MADE IN
GERMANY

Xelity switches are produced at Murrelektronik's headquarters in Oppenweiler. We adhere to a zero error policy in all areas and continuously invest in machinery, systems and quality control to further develop and improve technical processes. By involving our suppliers and consistently implementing process optimization measures, we produce high quality, state-of-the-art products.



GIGABIT SPEED DATA TRANSFER WITH 8-PORT SWITCH (ART. NO. 58173, 58176)


Murrelektronik's 8-port gigabit switches allow you to integrate devices, like vision cameras, that generate high volumes of data into your system. The gigabit switch also supports jumbo frames (up to 9216 bytes) and Vlan prioritizing to IEEE 802.3x standard.

NOW AVAILABLE IN A 16 PORT VERSION!

- 16-port unmanaged switch with Profinet prioritization
- 2 gigabit Ethernet uplink ports and 14 fast Ethernet downlink ports
- Redundant power supply and a metal housing

IP67 CONNECTIVITY

- 4 or 8 M12 ports (d-coded)
- EMC Resistant Housing
- Vibration-proof
- Wide temperature range (-25...60 °C)
- Profinet prioritization (QoS IEEE 802.1q)
- Redundant power supply (18...30V)

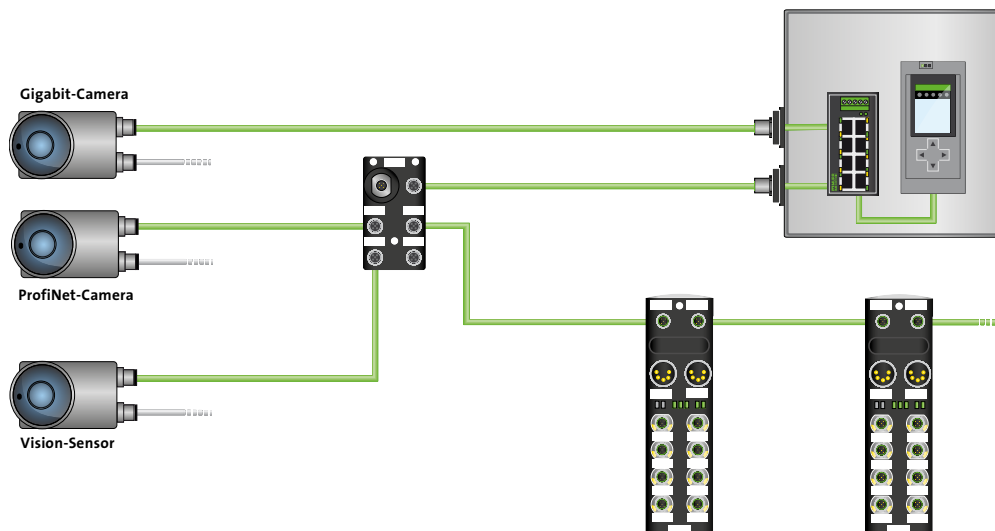



XENTERRA SWITCHES

Murrelektronik has expanded its switch portfolio with the new, compact Xenterra switch family. They are characterized by their flat yet robust design.

Xenterra is available in 5, 8 or 16 port versions allowing you to select the right sized switch for your application.

The switches can be either DIN rail or wall mounted which further reduces the space needed for installation.

The transmission speed of all Xenterra switches is 100Mbit/s.

SMALL DIMENSIONS ENABLE NEW APPLICATIONS:

- They can be cleverly integrated into machines with Panel PCs.
- They are suited for use with self-propelled transport systems (AGV) – the switches are screwed directly to the wall.
- They are ideal for small terminal boxes and narrow switch cabinets.





TREE PoE SWITCHES




Power over Ethernet provides a significant installation advantage. PoE cameras or PoE Panel PCs, which previously required one cable for power and one cable for data now only need a single cable for power and data transmission.

PoE switches are a must for reducing your wiring efforts. Murrelektronik's TREE series is made up of 5 to 8 port switches that have the option of supplying both 24V and 48V allowing users to select the switch that best meets their needs.

Another advantage – our TREE PoE switches use standard 8-pole RJ45 cables.



PRODUCT INFORMATION

Unmanaged switch			
			
Order data			
Art. No.	58810	58811	58812
Ports			
Fieldbus	4 × RJ45	6 × RJ45	8 × RJ45
Supply Switch	Push-in terminal: 0.2...2.5 mm ²		
Technical data			
Operating voltage	+9,5...31,5V		
Transfer rate	10/100 Mbit/s full duplex		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Web server	no		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	no		
Protocols	no		
Remote maintenance	no		
Alarm contact	no		
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP20		
Enclosure	Black plastic		
Montage	snaps onto TH35 mounting rail (EN 60715)		
Temperature range	-25 to +60 °C (storage temperature -40 to +85 °C)		
Dimensions H x W x D	140 × 30 × 85,1 mm	140 × 30 × 85,1 mm	105 × 41,6 × 85,1 mm
Weight	150 g	170 g	130 g
max. operating height	3000 m		
Power consumption	1,2 W		
Power consumption 24V	50 mA ± 25%		



PRODUCT INFORMATION

Unmanaged switch			
Order data			
Art. No.	58151/58152	58171	58172
Ports			
Fieldbus	4/8 x RJ45	8 x RJ45	6 x RJ45
Supply Switch	Federkraftsteckklemme: 0,2...2,5 mm ²	Screw plug-in terminal: 0.2...1.5 mm ²	
Technical data			
Operating voltage	2 x 9...48 V DC, redundant		2 x 9...30 V DC, redundant
Transfer rate	10/100 Mbit/s full duplex		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Web server	no		
VLAN (QoS) IEEE 802.P/ProfiNet Prio	yes		
Port Mirroring	no		
Protocols	no		
Remote maintenance	no		
Alarm contact	no		
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP20		
Enclosure	Metal black		
Montage	snaps onto TH35 mounting rail (EN 60715)		
Temperature range	-10 to +70 °C (storage temperature -40 to +85 °C)		
Dimensions H x W x D	110 x 22,5 x 89,6 mm/110 x 45,3 x 89,6 mm	90 x 45,2 x 78 mm	

PRODUCT INFORMATION

Unmanaged switch			
Order data			
Art. No.	58900	58901	58902
Designation	Xenterra 5 TX	Xenterra 5 TX WM	Xenterra 8 TX
Ports			
Fieldbus	5 × RJ45	5 × RJ45	8 × RJ45
Supply Switch	Spring clamp terminal: 0.2...2.5 mm ²		
Technical data			
Operating voltage	+9...36 V DC +8...28 V AC		
Transfer rate	10/100 Mbit/s full duplex		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Web server	no		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	no		
Protocols	no		
Remote maintenance	no		
Alarm contact	no		
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP20		
Enclosure	Anodized aluminum		
Montage	snaps onto TH35 mounting rail (EN 60715)	Wall mounting M4 hole, round head screw	snaps onto TH35 mounting rail (EN 60715)
Temperature range	-40 to +70 °C (storage temperature -40 to +85 °C)		
Dimensions H x W x D	105 × 42 × 32,5 mm	105 × 42 × 28 mm	105 × 58 × 32,5 mm
Weight	205 g		255 g
max. operating height	3000 m		
Power consumption	0,9 W		1,15 W

PRODUCT INFORMATION

Unmanaged switch			
			
Order data			
Art. No.	58903	58904	58905
Designation	Xenterra 8 TX WM	Xenterra 16 TX	Xenterra 16 TX WM
Ports			
Fieldbus	8 × RJ45	16 × RJ45	16 × RJ45
Supply Switch	Spring clamp terminal: 0.2...2.5 mm ²		
Technical data			
Operating voltage	+9...36 V DC +12...28 V AC		
Transfer rate	10/100 Mbit/s full duplex		
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Web server	no		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	no		
Protocols	no		
Remote maintenance	no		
Alarm contact	no		
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP20		
Enclosure	Anodized aluminum		
Montage	Wall mounting M4 hole, round head screw	snaps onto TH35 mounting rail (EN 60715)	Wall mounting M4 hole, round head screw
Temperature range	-40 to +70 °C (storage temperature -40 to +85 °C)		
Dimensions H x W x D	105 × 58 × 28 mm	105 × 110 × 32,5 mm	105 × 110 × 28 mm
Weight	350 g	405 g	
max. operating height	3000 m		
Power consumption	1,15 W		2,37 W



PRODUCT INFORMATION

Unmanaged switch



Order data		
Art. No.	58906	58907
Designation	Xenterra STX GE	Xenterra STX GE WM
Ports		
Fieldbus	5× RJ45	
Supply Switch	Push-in spring terminals, 0.2...2.5 mm ² (0.25...1.5 mm ²)	
Technical data		
Operating voltage	8...28 V AC/9...36 V DC	
Transfer rate	10/100/ 1000 Mbit/s full duplex	
Operating mode	Autocrossing/Autonegotiation	
Switch Management		
Web server	no	
VLAN (QoS) IEEE 802.P	yes	
Port Mirroring	no	
Protocols	no	
Remote maintenance	no	
Alarm contact	no	
Fieldbus	Profinet, Ethernet, Ethernet/IP	
General data		
Protection type	IP20	
Enclosure	Metal black	
Montage	snaps onto TH35 mounting rail (EN 60715)	Wall mounting M4 hole, round head screw
Temperature range	-40 to +70 °C (storage temperature -40 to +85 °C)	
Dimensions H x W x D	105×42×32.5 mm	
Weight	205 g	
max. operating height	3000 m	
Power consumption	0,9 W	
Diagnosis		
Communication status	per LED	
Monitoring – no voltage	yes	

PRODUCT INFORMATION

Unmanaged switch



Order data		
Art. No.	58908	58909
Designation	Xenterra 8TX GE	Xenterra 8TX GE WM
Ports		
Fieldbus	8× RJ45	
Supply Switch	Push-in spring terminals, 0.2...2.5 mm ² (0.25...1.5 mm ²)	
Technical data		
Operating voltage	8...28 V AC/9...36 V DC	
Transfer rate	10/100/ 1000 Mbit/s full duplex	
Operating mode	Autocrossing/Autonegotiation	
Switch Management		
Web server	no	
VLAN (QoS) IEEE 802.P	yes	
Port Mirroring	no	
Protocols	no	
Remote maintenance	no	
Alarm contact	no	
Fieldbus	Profinet, Ethernet, Ethernet/IP	
General data		
Protection type	IP20	
Enclosure	Metal black	
Montage	snaps onto TH35 mounting rail (EN 60715)	Wall mounting M4 hole, round head screw
Temperature range	-40 to +70 °C (storage temperature -40 to +85 °C)	
Dimensions H x W x D	105×42×32.5 mm	
Weight	255 g	
max. operating height	3000 m	
Power consumption	1,15 W	
Diagnosis		
Communication status	per LED	
Monitoring – no voltage	yes	

PRODUCT INFORMATION

Unmanaged switch			
			
Order data			
Art. No.	58173	58174	58176
Ports			
Fieldbus	8 x RJ45	16 x RJ45	8 x RJ45
Supply Switch	Screw plug-in terminal: 0.2...1.5 mm ²		
Technical data			
Operating voltage	2 x 9...48 V DC, redundant		2 x 9...30 V DC, redundant
Transfer rate	10/100/1000 Mbit/s full duplex	14 x 10/100 & 2x 10/100/1000 Mbit/s full duplex	8x 10/100/1000 Mbit/s full duplex
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Web server	no		
VLAN (QoS) IEEE 802.P	yes		
Port Mirroring	no		
Protocols	no		
Remote maintenance	no		
Alarm contact	no		
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP20		
Enclosure	Metal black		Black plastic
Montage	snaps onto TH35 mounting rail (EN 60715)		
Temperature range	-10...+70 °C (Storage temperature -40...+85 °C)	0...+70 °C (Storage temperature -20...+70 °C)	0...+60 °C (Storage temperature -10...+70 °C)
Dimensions H x W x D	90 x 45,2 x 78 mm	145 x 54 x 113 mm	90 x 45,2 x 78 mm
Diagnosis			
Communication status	per LED		
Monitoring – no voltage	yes		



PRODUCT INFORMATION

Unmanaged switch		
Order data		
Art. No.	58160	58161
Ports		
Fieldbus	4 × M12 (Female), D-coded	8 × M12 (Female), D-coded
System supply	1 × M12 (Male), A-coded	1 × M12 (Male), A-coded
Technical data		
Betriebsspannung	2 × 18...30 V DC, redundant	
Transfer rate	10/100 Mbit/s full duplex	
Operating mode	Autocrossing/Autonegotiation	
Switch Management		
Switch Form	Unmanaged switch	
Web server	no	
VLAN (QoS) IEEE 802.p	yes	
Port Mirroring	no	
Protocols	no	
Remote maintenance	no	
Alarm contact	no	
General data		
Protection type	IP67	
Enclosure	Zinc die-cast, matt nickel-plated	
Temperature range	-25...+60 °C (Storage temperature -40...+80 °C)	
Fastening type	4-hole screw fastening	
Dimensions H x W x D	95 × 55 × 31 mm	145 × 55 × 31 mm
Diagnosis		
Communication status	per LED	
Monitoring – no voltage	yes	

PRODUCT INFORMATION

Unmanaged PoE Switch



Order data	
Art. No.	58190
Designation	TREE 5 TX 4 PoE GE 48V
Ports	
Fieldbus	5 x RJ45
Supply Switch	Screw terminal 0.2 ... 2.5 mm ²
Technical data	
Betriebsspannung	12 - 57 V DC
Transfer rate	RJ45 10/100/1000 Mbit/s full duplex
Operating mode	Autocrossing/Autonegotiation
Switch Management	
Web server	no
VLAN (QoS) IEEE 802.p	yes
Port Mirroring	no
Protocols	no
Remote maintenance	no
Alarm contact	no
Fieldbus	Profinet, Ethernet, Ethernet/IP
General data	
Protection type	IP20
Enclosure	Metal
Montage	snaps onto TH35 mounting rail (EN 60715)
Temperature range	-40 to +70 °C (storage temperature -40 to +85 °C)
Dimensions H x W x D	110 x 32 x 90 mm
Diagnosis	
Communication status	per LED
Monitoring – no voltage	yes

PRODUCT INFORMATION

Unmanaged PoE Switch




Order data			
Art. No.	58192	58193	58194
Designation	TREE 8 TX 4 PoE GE	TREE 8 TX 8 PoE GE	TREE 10 TX 4 PoE 2 SFP GE
Ports			
Fieldbus	8 × RJ45	8 × RJ45	8 × RJ45 2 × SFP
Supply Switch	Spring force terminal 0.2 ... 2.5 mm ²		
Technical data			
Operating voltage	12-57 V DC		
Transfer rate	RJ45 10/100/1000 Mbit/s full duplex		RJ45 SFP 100/1000 Mbit/s full duplex
Operating mode	Autocrossing/Autonegotiation		
Switch Management			
Web server	no		
VLAN (Qos) IEEE 802.P	yes		
Port Mirroring	no		
Protocols	no		
Remote maintenance	no		
Alarm contact	no		
Fieldbus	Profinet, Ethernet, Ethernet/IP		
General data			
Protection type	IP20		
Enclosure	Metal		
Montage	snaps onto TH35 mounting rail (EN 60715)		
Temperature range	-40...+75 °C (Storage temperature -40...+85 °C)		
Dimensions H x W x D	145 x 54 x 113 mm		
Diagnosis			
Communication status	per LED		
Monitoring – no voltage	yes		




FIELDS OF APPLICATION

Switches play a number of roles in installations.


They link PLCs with Ethernet users and they are also used in fieldbus applications to connect a wide range of modules.

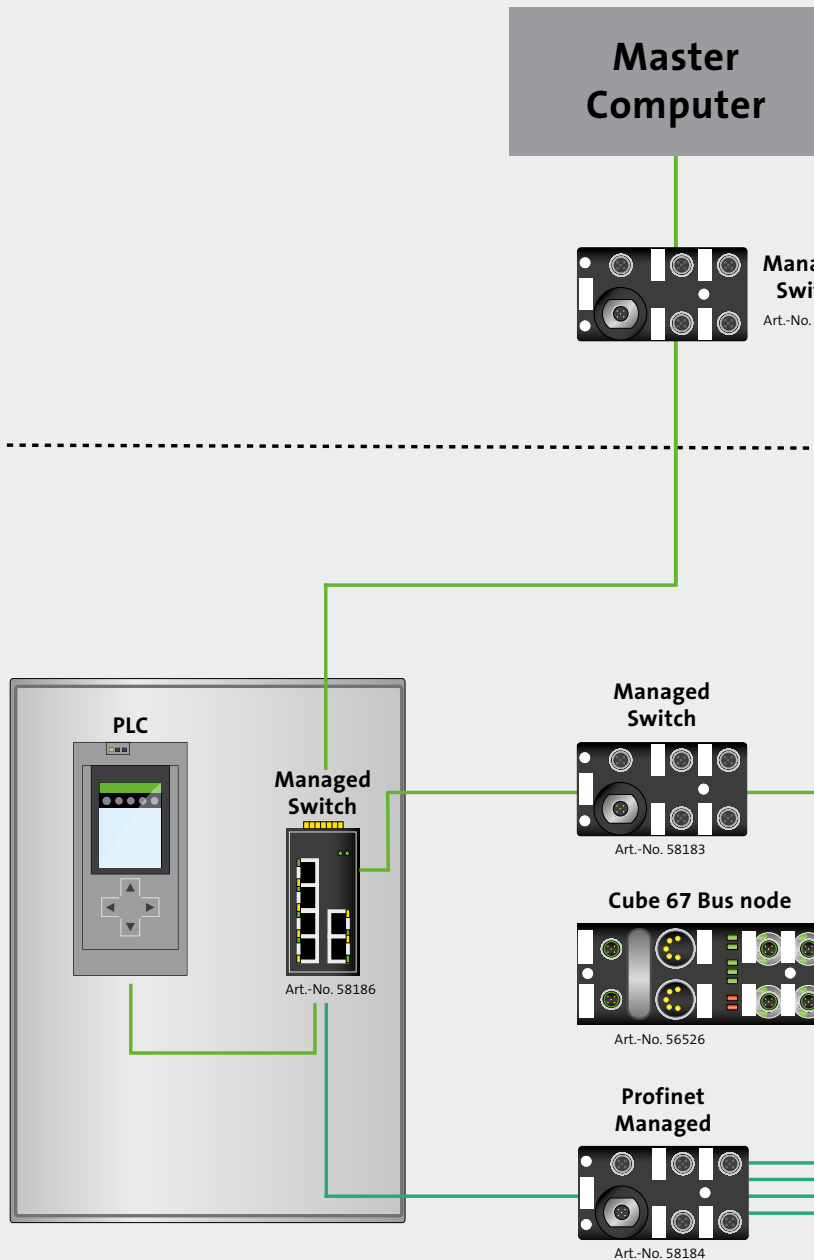

NAT-SWITCH



ETHERNET

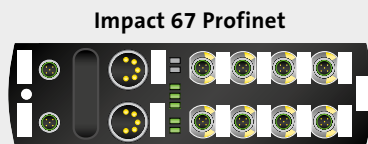


Impact 67 Profinet

Art.-No. 55132

PROFINET[®]

MODULE I/O BUS

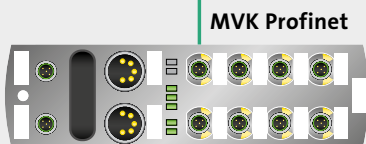

MVK Profinet

Art.-No. 55532

Camera Ethernet
100 Mbit



NAT SWITCH

NAT function


NAT = Network Address Translation


Address conflicts occur when machinery and modules have the same address in a company network.

NAT switches are used to separate IP address ranges.

Only the requested server can set up data communication with a machine.

Other servers sending data to the switch are blocked by the firewall to suppress network attacks.

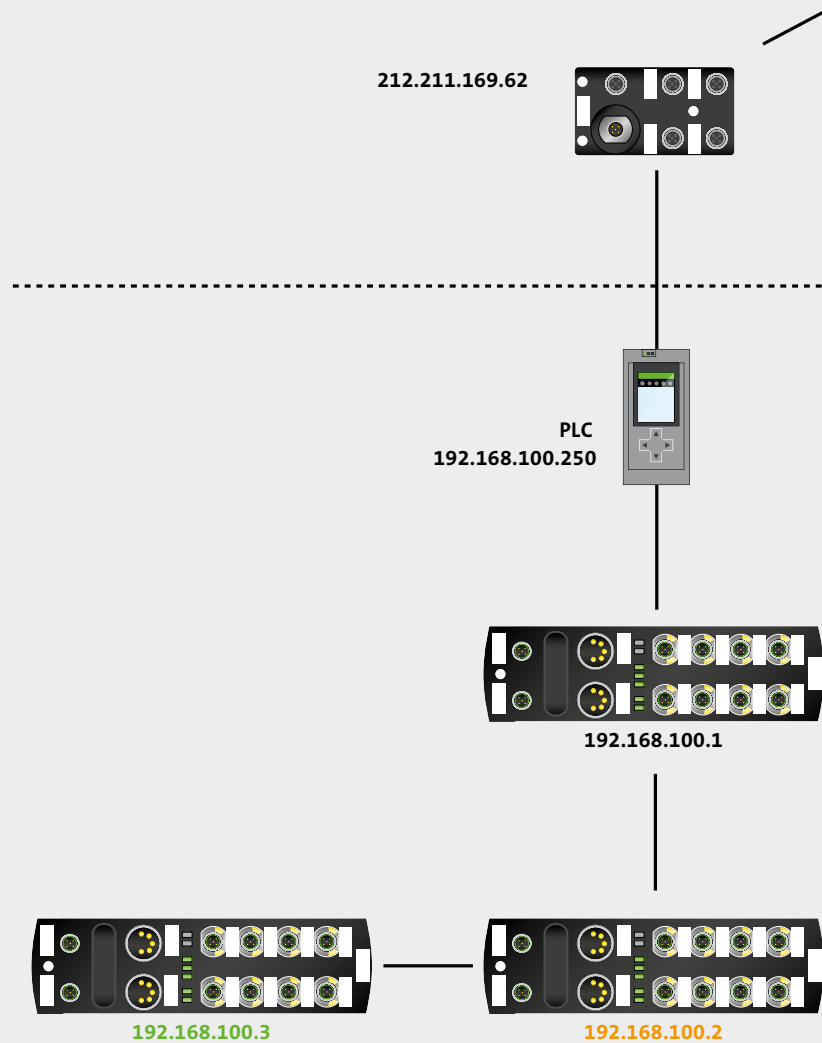

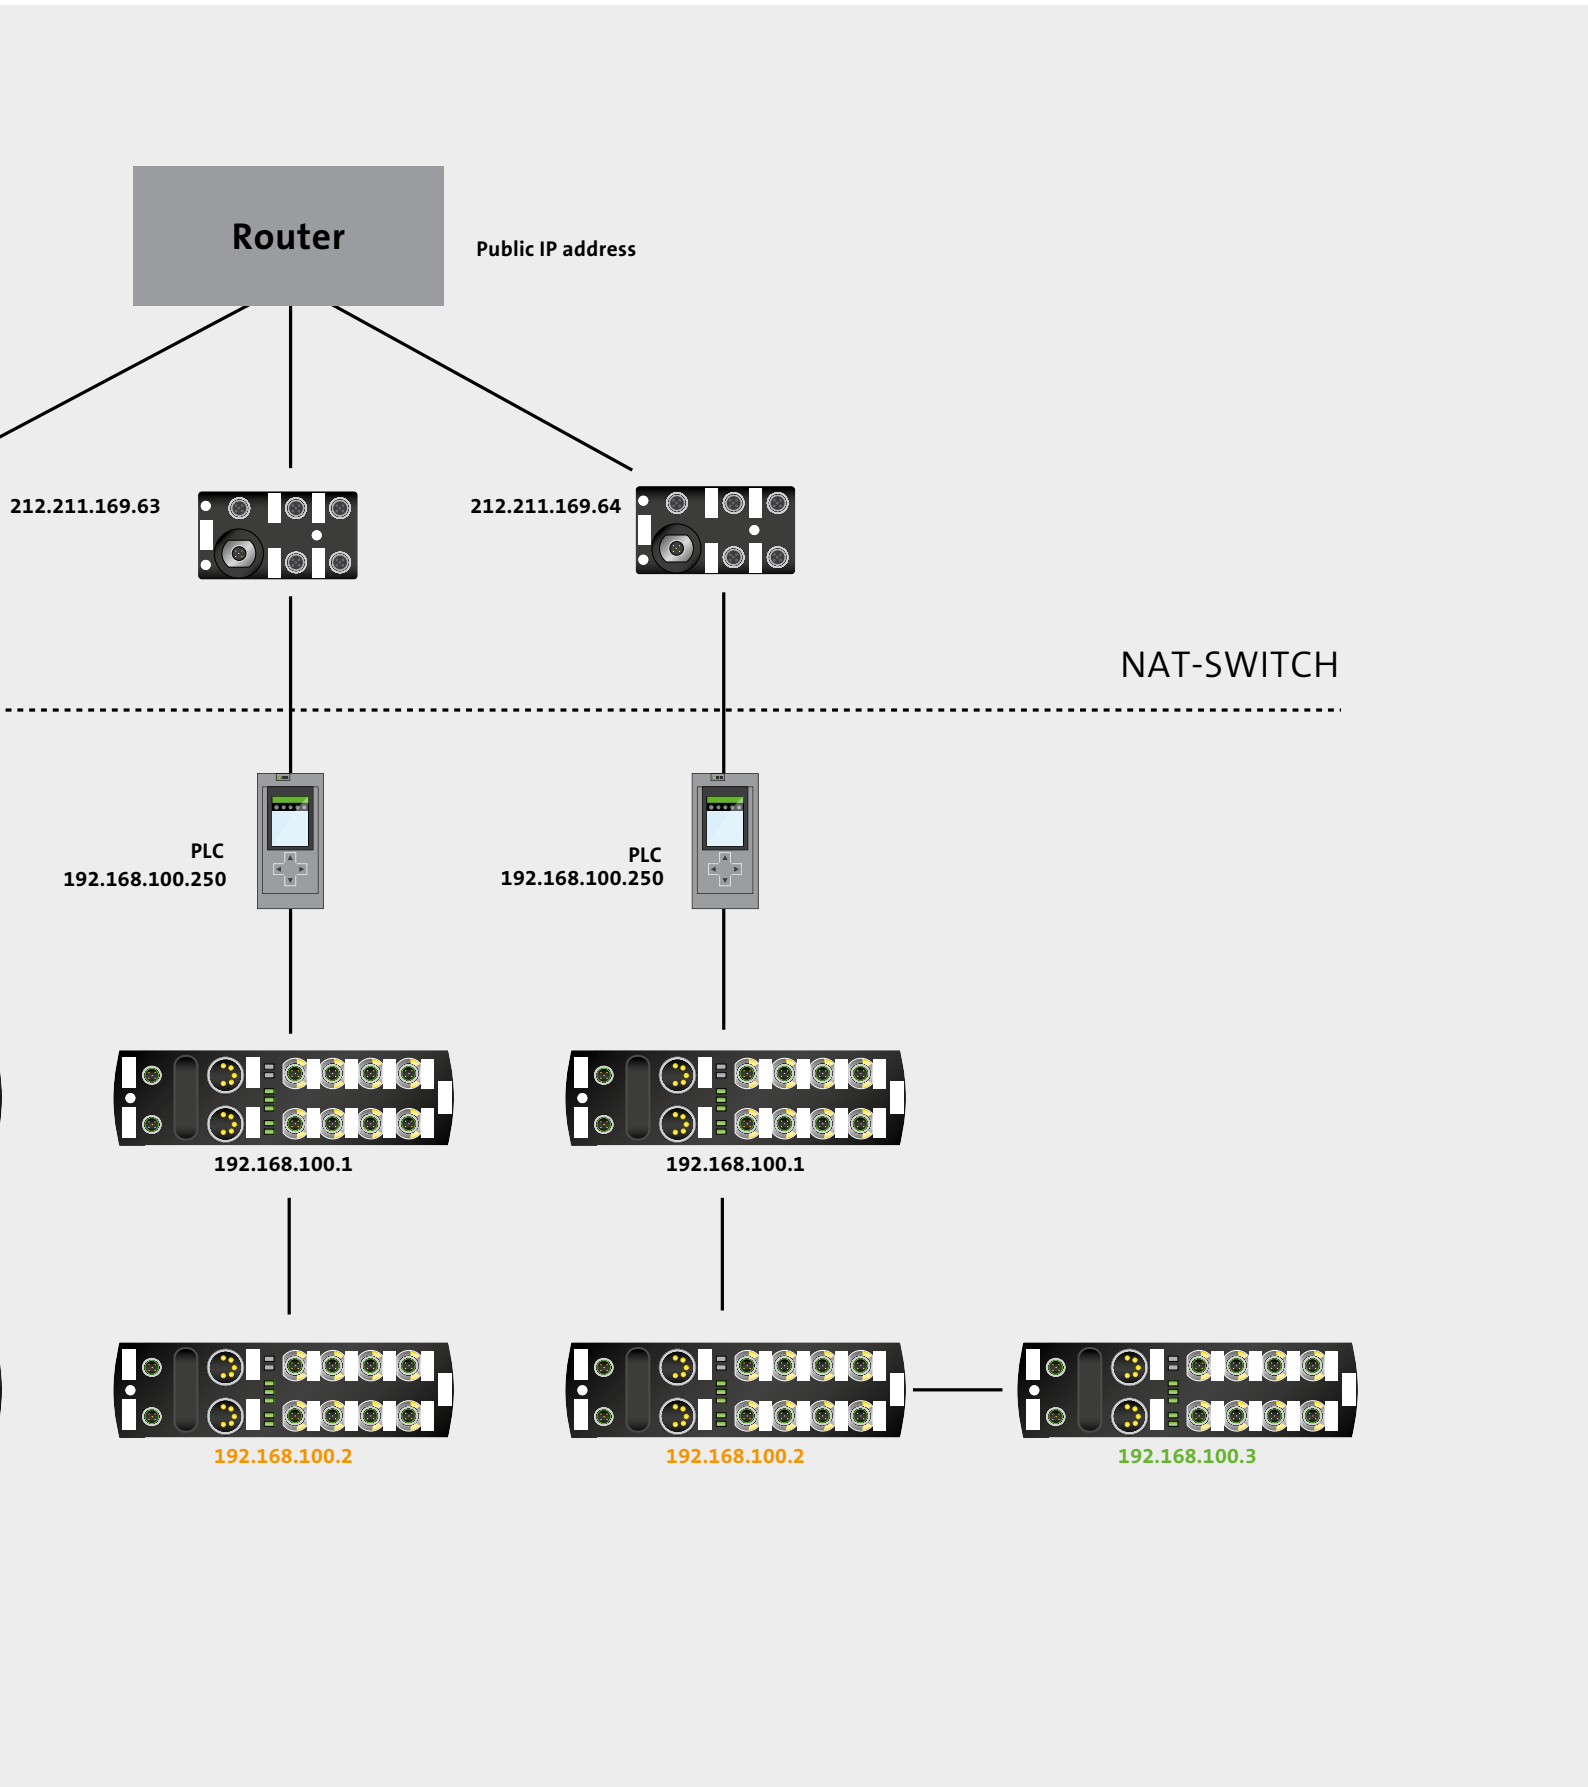



SM-R MANAGED SWITCHES

Yacoub Automation GmbH's SM-R etherRAIL managed switches are specially designed for use in harsh environments. The components are available in 8 x 100 Mbit and 8 x 1 Gigabit versions with M12 ports. SM8+2TX R PoE+ switches will be added to the family soon.



The devices are ideal for use in buses and trains as well as for cost-effective construction and expansion of decentralized industrial Ethernet networks.

The SM-R series supports full network management via SNMP and has an integrated web server for extensive configuration and diagnostics. The implemented protocols are BootP, SNMP (v1, v2, v3), RSTP, LLDP, NTP, DHCP, DHCP Option 82 and DCP.

Their compact design and IP54 rating allow the devices to be used outside the control cabinets without any problems. The switch can be installed in most any environment as its temperature range goes from -40 to + 70°C.



PRODUCT INFORMATION

Managed Switch / PoE+



Order data			
Art. No.	03.105.1	03.106.1	03.105.3
Designation	SM 8TX-R	SM 8GTX-R	SM 8+2TX-R PoE+
Ports			
Fieldbus	8 x M12D (Female)	8 x M12X (Female)	8 x M12D / 2 x M12X (Female)
System supply	1 x M12A (Male)	1 x M12A (Male)	1 x M12A (Male)
Supply voltage	9,5 - 32,0 V	9,5 - 32,0 V	16,8 - 32,0 V
Reverse polarity protection	yes		
Overvoltage protection	yes		
PoE			
Ports			8 x M12D
IEEE 802.3 af/at			yes
Maximum power device			60 W
Maximum performance per port			30 W
Technical data			
Operating voltage	2 x 24 V via M12, A-coded	1 x 24 V via M12, A-coded	2 x 24 V via M12, A-coded
Transfer rate	10/100 Mbit/s	10/100/1000 Mbit/s	10/100/1000 Mbit/s
Operating mode	Autocrossing / Autonegotiation		
Switch Management			
Web server	HTTP, HTTPS		
Port Mirroring	yes		
Frame Priority (QoS) IEEE 802.1Q	yes		
Protocols	BootP, SNMP (v1, v2, v3), RSTP, LLDP, NTP, DHCP, DHCP Option 82, DCP		
Remote maintenance	openVPN		
Fieldbus	Ethernet		
General data			
Protection type	IP54		
Enclosure	Die casting black		
Fastening type	4-hole screw mounting		
Temperature range	-40...+70 °C		
Dimensions H x W x D	176x121x53 mm	176x121x53 mm	176x121x70 mm
Weight	650 g	750 g	900 g
max. operating height	3000 m		
Schock/Vibration	30g/10g		
Diagnosis			
Communication status	per LED		
Monitoring – no voltage	yes		



CONNECTION CONCEPTS

FACTS WORTH KNOWING


Every connector at Murrelektronik is fully tested.

- Electrical
- High voltage
- Function
- Pin connection
- Short circuit
- Visual check



MODULAR ARTICLE NUMBERS


xxx = art. no. of the desired cable type
yyyy = cable length

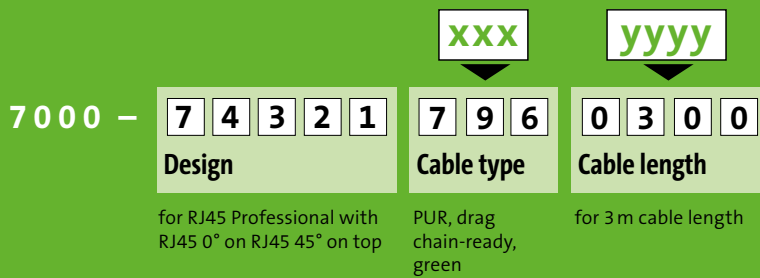

Cable type (xxx)	Art. No.
PUR, suitable for drag chains, yellow	675
PUR, drag chain capable, blue	677
PUR, drag chain capable, red	792
PUR, torsion, green	793
PUR, flexible installation, green	794
PUR, drag chain compatible, green	796
PUR, drag chain compatible, violet	798
PVC, drag chain capable, green	800

Cable length (yyyy): 1.5 m (0150); 3.0 m (0300); 5.0 m (0500); 7.5 m (0750); 10 m (1000) and many other lengths

RJ45 CABINET LINE (FIXED INSTALLATION)

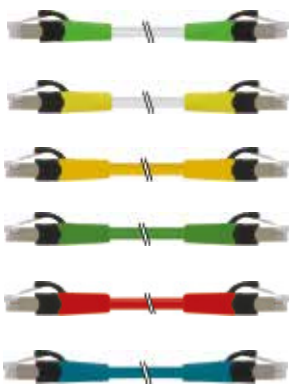





Designation	Art. No.	suitable for
Cabinet Line RJ45 pc. 0°/ RJ45 pc. 0° grey, Ethernet 4-pin, AWG26 (0.14 mm ²)	7000-74701-777yyyy	all common Industrial Ethernet Systems
Cabinet Line RJ45 pc. 0°/ RJ45 pc. 0° Gigabit, grey, 8-pin, AWG27 (0.14 mm ²)	7000-74711-778yyyy	all common Industrial Ethernet Systems
Cabinet Line RJ45 pc. 0°/ RJ45 pc. 0° Gigabit, yellow, 8-pin, AWG27 (0.14 mm ²)	7000-74711-378yyyy	all common Industrial Ethernet Systems
Cabinet Line RJ45 pc. 0°/ RJ45 pc. 0° Gigabit, green, 8-pin, AWG26 (0.14 mm ²)	7000-74711-478yyyy	all common Industrial Ethernet Systems
Cabinet Line RJ45 pc. 0°/ RJ45 pc. 0° Gigabit, red, 8-pin, AWG27 (0.14 mm ²)	7000-74711-578yyyy	all common Industrial Ethernet Systems
Cabinet Line RJ45 pc. 0°/ RJ45 pc. 0° Gigabit, blue, 8-pin, AWG27 (0.14 mm ²)	7000-74711-878yyyy	all common Industrial Ethernet Systems





Further variants are possible

RJ45 PROFESSIONAL

4-pole, overmolded | transfer properties in line with CAT5 ISO/IEC 11801 Class D, AWG22 (0.34mm²)

				
	RJ45 connector 0°	RJ45 connector 45° on top	RJ45 connector 45° on bottom	RJ45 connector 45° on left
RJ45 connector 0°	7000-74301-xxxxxyyy	7000-74321-xxxxxyyy	7000-74341-xxxxxyyy	7000-74361-xxxxxyyy
RJ45 connector 45° on top	7000-74321-xxxxxyyy	7000-74401-xxxxxyyy	7000-74421-xxxxxyyy	7000-74441-xxxxxyyy
RJ45 connector 45° on bottom	7000-74341-xxxxxyyy	7000-74421-xxxxxyyy	7000-74481-xxxxxyyy	7000-74501-xxxxxyyy
RJ45 connector 45° on left	7000-74361-xxxxxyyy	7000-74441-xxxxxyyy	7000-74501-xxxxxyyy	7000-74541-xxxxxyyy
RJ45 connector 45° on right	7000-74381-xxxxxyyy	7000-74461-xxxxxyyy	7000-74521-xxxxxyyy	7000-74561-xxxxxyyy
RJ45 connector 90° on top	7000-74327-xxxxxyyy	7000-74407-xxxxxyyy	-	-
RJ45 connector 90° on bottom	7000-74347-xxxxxyyy	7000-74427-xxxxxyyy	7000-74487-xxxxxyyy	-
RJ45 connector 90° on left	7000-74367-xxxxxyyy	7000-74447-xxxxxyyy	7000-74507-xxxxxyyy	7000-74547-xxxxxyyy
RJ45 connector 90° on right	7000-74387-xxxxxyyy	7000-74467-xxxxxyyy	7000-74527-xxxxxyyy	7000-74567-xxxxxyyy

				
	RJ45 connector 45° on right	RJ45 connector 90° on top	RJ45 connector 90° on bottom	RJ45 connector 90° on left
RJ45 connector 0°	7000-74381-xxxxxyyy	7000-74327-xxxxxyyy	7000-74347-xxxxxyyy	7000-74367-xxxxxyyy
RJ45 connector 45° on top	7000-74461-xxxxxyyy	7000-74407-xxxxxyyy	7000-74427-xxxxxyyy	7000-74447-xxxxxyyy
RJ45 connector 45° on bottom	7000-74521-xxxxxyyy	-	7000-74487-xxxxxyyy	7000-74507-xxxxxyyy
RJ45 connector 45° on left	7000-74561-xxxxxyyy	-	-	7000-74547-xxxxxyyy
RJ45 connector 45° on right	7000-74581-xxxxxyyy	-	-	-
RJ45 connector 90° on top	-	7000-74409-xxxxxyyy	7000-74429-xxxxxyyy	7000-74449-xxxxxyyy
RJ45 connector 90° on bottom	-	7000-74429-xxxxxyyy	7000-74489-xxxxxyyy	7000-74509-xxxxxyyy
RJ45 connector 90° on left	-	7000-74449-xxxxxyyy	7000-74509-xxxxxyyy	7000-74549-xxxxxyyy
RJ45 connector 90° on right	7000-74587-xxxxxyyy	7000-74469-xxxxxyyy	7000-74529-xxxxxyyy	7000-74569-xxxxxyyy

				
	M12 connector 0°	M12 female connector 0°	M12 connector 90°	With open end cable
RJ45 connector 0°	7000-44711-xxxxxyyy	7000-44621-xxxxxyyy	7000-44761-xxxxxyyy	7000-74101-xxxxxyyy
RJ45 connector 45° on top	7000-44721-xxxxxyyy	7000-44631-xxxxxyyy	7000-44771-xxxxxyyy	7000-74121-xxxxxyyy
RJ45 connector 45° on bottom	7000-44731-xxxxxyyy	7000-44641-xxxxxyyy	7000-44781-xxxxxyyy	7000-74141-xxxxxyyy
RJ45 connector 45° on left	7000-44741-xxxxxyyy	7000-44651-xxxxxyyy	7000-44791-xxxxxyyy	7000-74161-xxxxxyyy
RJ45 connector 45° on right	7000-44751-xxxxxyyy	7000-44661-xxxxxyyy	7000-44801-xxxxxyyy	7000-74181-xxxxxyyy
RJ45 connector 90° on top	7000-44727-xxxxxyyy	7000-44637-xxxxxyyy	7000-44777-xxxxxyyy	7000-74221-xxxxxyyy
RJ45 connector 90° on bottom	7000-44737-xxxxxyyy	7000-44647-xxxxxyyy	7000-44787-xxxxxyyy	7000-74241-xxxxxyyy
RJ45 connector 90° on left	7000-44747-xxxxxyyy	7000-44657-xxxxxyyy	7000-44797-xxxxxyyy	7000-74261-xxxxxyyy
RJ45 connector 90° on right	7000-44757-xxxxxyyy	7000-44667-xxxxxyyy	7000-44807-xxxxxyyy	7000-74281-xxxxxyyy



M12 CONNECTORS FOR ADVANCED INDUSTRIAL ETHERNET APPLICATIONS

Murrelektronik's X-coded M12 cordsets are the solution for error-free, high-speed data transfer at speeds of up to 10 gigabits per second.

A metal cross (X-shaped) in the connector safely separates the four data pairs from each other while the internal shielding protects the cable from external interference.

The combination of our X-coded M12 connectors with highly resistant PUR cables equals a cordset designed for industrial applications.



■ Increased requirements

The demand for higher transfer rates is on the rise in industrial Ethernet applications. The best example of this are high speed vision systems, which generate a large volume of data. These cables are also becoming more common in standard installations as well.

Murrelektronik's high quality industrial M12 connectors are the right solution.

- 10 Gbit/s data transfer rate according to Cat. 6A (ISO/IEC 11801)
- Soldered shield connection between cable and connector
- 360° shielding end to end
- IP65/67 rating



Designation	Art. No.
M12 connector straight X-coding, open end cable	7000-21001-790xxxx
M12 connector angled X-coding, open end cable	7000-21021-790xxxx
M12 connector straight X-coding, M12 connector straight X-coding (connecting cable)	7000-51001-790xxxx
M12 connector X-coding, insulation displacement technique	7000-21101-0000000
M12 flange female connector X-coding, front panel mounting, dip-solder contacts	7000-21151-0000000
M12 flange female connector X-coding, rear panel mounting, dip-solder contacts	7000-21161-0000000

M12 CONNECTORS FOR ADVANCED INDUSTRIAL ETHERNET APPLICATIONS

Murrelektronik's Y-coded M12 cordsets transfer data and power in one connector.

The metal "Y" in the connector separates the four power transfer contacts from the four signal contacts in the pin arrangement making it possible to transfer up to 100 megabits per second of data while also providing 2 x 6A power.

Our Y-coded M12 connectors are combined with PUR cables making them suitable for a wide variety of moving applications.








■ Increased requirements

In industrial Ethernet applications, companies are focusing increasingly on installation costs. Single cable transmission of power and data helps reduce both the number of components required and costs.

Murrelektronik's high quality industrial M12 connectors are the right solution.

- **Parallel transfer of data and power with one connector**
- **Data transfer according to Cat. 5e (ISO/IEC 11801, Class D)**
- **Provides 2 x 6A power**
- **360° full shielding**
- **IP65/67 Rated**

	Designation	Art. No.
	M12 connector straight Y-coding, open end cable	7000-15501-831xxxx
	M12 connector angled Y-coding, open end cable	7000-15521-831xxxx
	M12 connector straight Y-coding, M12 connector straight Y-coding (connecting cable)	7000-47001-831xxxx
	M12 M12 flange female connector Y-coding, dip-solder contacts	7000-15701-0000000
	M12 flange female connector Y-coding, dip-solder contacts	7000-15711-0000000



www.murrelektronik.com

The specifications in this brochure were compiled with the greatest possible care. Liability for their correctness, completeness and currentness shall be confined to gross negligence.

Our social commitment encompasses all our corporate activities. We also ensure that our brochures are produced in an environmentally friendly manner.

